

# Full Moon Bed Assembly Instructions


*Dave Cady's* **NOMAD FURNITURE**  
Albuquerque, NM [www.nomadfurniture.com](http://www.nomadfurniture.com) 505-250-5231

## Tools needed for assembly

A Phillips screwdriver  
Rubber mallet or hammer w/block included  
Optional: one friend

### **Bed parts list**

2 short legs with shoulder screws  
2 long bed legs-headboard  
2 lower crosspieces with 3/16" drilled holes  
1 crosspieces with no holes  
2-wide curved crosspieces with 1/2" bored holes  
2-side rails with ledgers  
1-center support (2 for King size)  
1 strapped slat roll  
4-5/8" shoulder screws  
2-1" screws (for slats)  
Rubber bands  
**Extra Footboard Option:**  
Add 1 more crosspiece  
With 2 longer legs

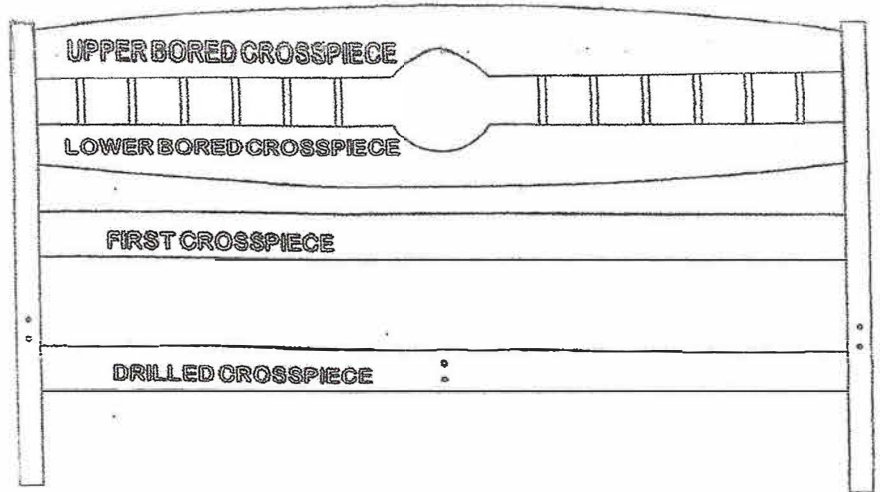

**Illustration A**

## **Headboard Assembly**

1. If possible, go to this site for photo slides of assembly [NOMADFURNITURE.COM/BED-ASSEMBLY-GALLERY/](http://NOMADFURNITURE.COM/BED-ASSEMBLY-GALLERY/)
2. Identify all pieces before beginning. Lay out parts as shown in written instructions.

**Note:** To protect the wood only use a hammer with the wood block in shipping box as a pad, to tap down parts. Or a rubber mallet works nicely with a baggie over the mallet (no black marks).

3. Attach drilled crosspiece to the bottom set of shoulder screws on one long leg and firmly tap down snug.

**Note:** When attaching crosspieces to shoulder screws on legs; the top shoulder screw should be located in the center of the crosspiece. Refer to our "CAUTION SHEET" and use the alignment stick to assist with assembly.

4. Attach first crosspiece to the second set of shoulder screws on the same long leg and tap down snug.
5. Prop up a bored crosspiece so holes are on top and connectors ends open up.
6. Insert dowels into the crosspiece.
7. Hold the other bored crosspiece with the holes facing down over the dowels.
8. Starting at the right end, insert the first dowel into the first hole. Slip rubber band over the right ends as shown in Illustration B.
9. Continue from right to left inserting one dowel at a time until all dowels are inserted. Slip second rubber bank over left end to hold the crosspieces, thus trapping the dowels.
10. Lay the parts down and use the 1/2" spacer to help align the unit to the leg. (see Caution Sheet) Connect unit to top set of shoulder screws on the long leg. Tap top cross piece only until unit is snug.

**Note:** When connecting rails and crosspieces to legs, rail ends should be pushed down over pins.

11. Add lower crosspiece to the same leg and tap down snug.
  12. Attach all the crosspieces simultaneously to the other headboard leg using the 1/2" spacer to help. Tap down snug.
- Note:** It is important that all joints are tapped down completely.
13. Cut rubber bands when completely connected.

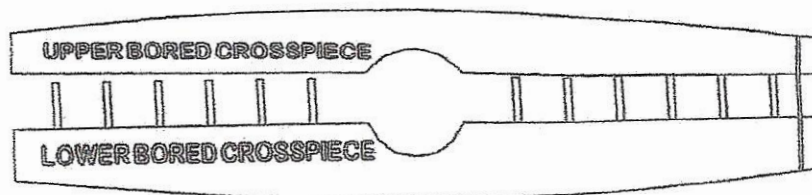


Illustration B

### Bed Frame Assembly

1. Assemble footboard as shown. Be sure to attach drilled crosspiece to **LOWER** set of shoulder screws.
  2. Tap down on crosspieces using rubber mallet (or hammer with wood block) to make sure all joints are snug.
- Note: When connecting rails and crosspieces to legs, rail ends should be pushed **down** over shoulder screws. See Caution Sheet for proper alignment.
3. Install four 5/8" shoulder screws into predrilled holes in the two lower crosspieces.
  4. Attach headboard to footboard (after you assemble the headboard Illustration B) using the two side rails.
  5. Attach the center support rail to the head and footboard lower crosspieces (it will be tight).
  6. Tap down rails and center support until snug.
- Note: It is important that all joints are tapped down completely.
7. Install four 5/16" X 1" wood pins in holes in side rail ledges.
  8. Lay out slat roll, strap up, so that end slats overlap wood pins.
  9. **Important:** Screw center slat tight to side rail ledge using two 1" screws. Make sure the slat is tight against the side rail. Failure to screw down center slat may cause damage to the bed.

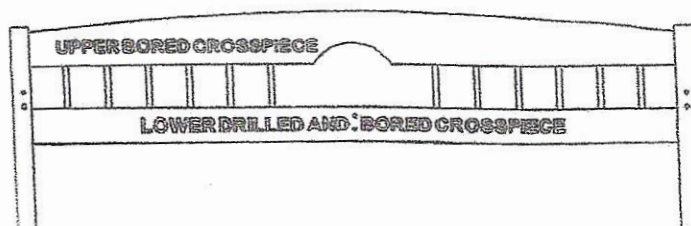


Illustration C

### Optional Extra Bed Footboard Instructions

1. Layout and identify parts. See **Illustration C**
2. **Important:** Check that the crosspiece with shoulder screws holes and holes for dowels are the bottom footboard piece.
3. Assemble unit as in Illustration B.
4. Install into footboard as a unit. Tap down on top crosspiece until snug.

### Optional Y-Blocks

1. Locate Y shaped support blocks with screws.
2. After bed is assembled screw Y blocks to middle of center supports using the screws provided.
3. Make sure support block is tight to the center support.

#### *Dave Cady's Nomad Furniture Limited Warranty*

Nomad Furniture guarantees all of our products to be free of defects in materials or craftsmanship. During the first 60 days most problems will be evident. Call your retailer or Nomad Furniture for return instructions and we will pay the freight. After 60 days of normal use simply return any part that is defective and we will repair or replace it at no cost to the original owner for 5 years.