


Rainbow Bed Assembly Instructions

Dave Cady's NOMAD FURNITURE

Albuquerque, NM www.nomadfurniture.com 505-250-5231

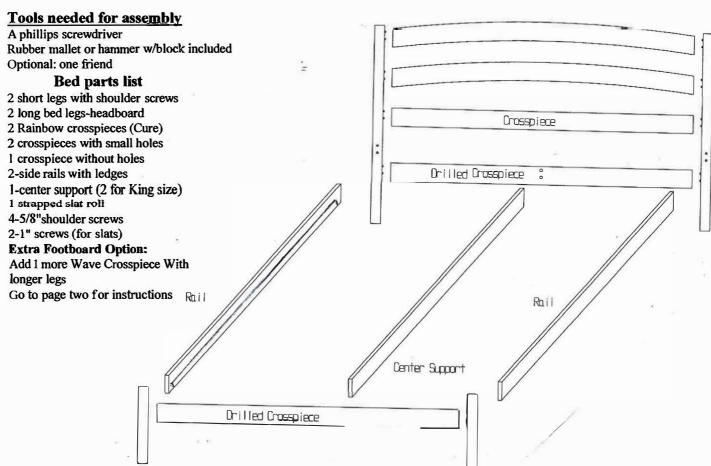

HeadboardAssembly

- 1. If possible, go to this site for photo slides of assembly NOMADFURNITURE.COM/BED-ASSEMBLY-GALLERY!
- 2. Identify all pieces before beginning. Lay out parts as shown in written instructions.

Note: To protect the wood only use a hammer with the wood block in shipping box as a pad, to tap down parts. Or a rubber mallet works nicely with a baggie over the mallet (no black marks).

3. Attach one of the drilled crosspiece to the bottom set of shoulder screws on one long leg and tap down snug.

Note: When connecting rails and crosspieces to legs, slotted ends should be pushed down over screws. Refer to our "CAUTION SHEET" and use the alignment stick to assist with assembly.

- 4. Attach undrilled crosspiece to the second set of shoulder screws on the same long leg and tap down snug.
- 5. Choose and attach lower Rainbow crosspiece to third set of screws.
- 6. Attach remaining Rainbow crosspiece to the highest set of screws.
- 7. At this point all the crosspieces should be attached to one headboard leg.
- 8. Grab the remaining long headboard leg and simultaneously attach all four crosspieces. Lay the headboard down and use the ½" spacer alignment stick to connect crosspieces to leg. Tap down snug.
- 9. Add lower crosspiece to the same leg and tap down snug.
- 10. Attach all the crosspieces simultaneously to the other headboard leg using the ½" spacer to help. Tap down snug. Note: It is important that all joints are tapped down completely.

Bed Frame Assembly

- 1. Assemble footboard as shown. Be sure to attach drilled crosspiece to LOWER set of shoulder screws.
- Tap down on crosspieces using rubber mallet (or hammer with wood block) to make sure all joints are snug.
 Note: When connecting rails and crosspieces to legs, rail ends should be pushed down over shoulder screws. See "Caution Sheet for alignment.
- 3. Install four 5/8" shoulder screws into predrilled holes in the two lower crosspieces.
- 4. Attach headboard to footboard (after you assemble the headboard Illustration B) using the two side rails.
- 5. Attach the center support rail to the head and footboard lower crosspieces (it will be tight).
- 6. Tap down rails and center support until snug.

Note: It is important that all joints are tapped down completely.

- 7. Install four 5/16" X 1" wood pins in holes in side rail ledgers.
- 8. Lay out slat roll, strap up, so that end slats overlap wood pins.
- 9. Important: Screw center slat tight to side rail ledge using two 1" screws. Make sure the slat is tight against the side rail. Failure to screw down center slat may cause damage to the bed.


Use the Alignment Stick when connecting the headboard legs and crosspieces

Optional Extra Bed Footboard Instructions

- 1. Layout and identify parts.
- 2. Important: Check that the crosspiece with shoulder screws holes and holes for dowels are the bottom footboard piece.
- 3. Assemble unit as above...
- 4. Install into footboard as a unit. Tap down on top crosspiece until snug.

Optional Y-Blocks

- 1. Locate Y shaped support blocks with screws.
- 2. After bed is assembled screw Y blocks to middle of center supports using the screws provided.
- 3. Make sure support block is tight to the center support.

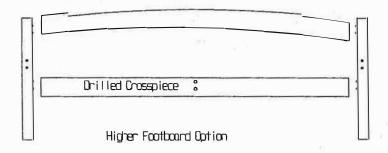

Dave Cady's Nomad Furniture Limited Warranty

Nomad Furniture guarantees all of our products to be free of defects in materials or craftsmanship. During the first 60 days most problems will be evident. Call your retailer or Nomad Furniture for return instructions and we will pay the freight. After 60 days of normal use simply return any part that is defective and we will repair or replace it at no cost to the original owner for 5 years.